


THE CORRECT STACKING UNIT FOR YOUR PRODUCTS



Stacker device for pillow bags




90° feeding with stacker device

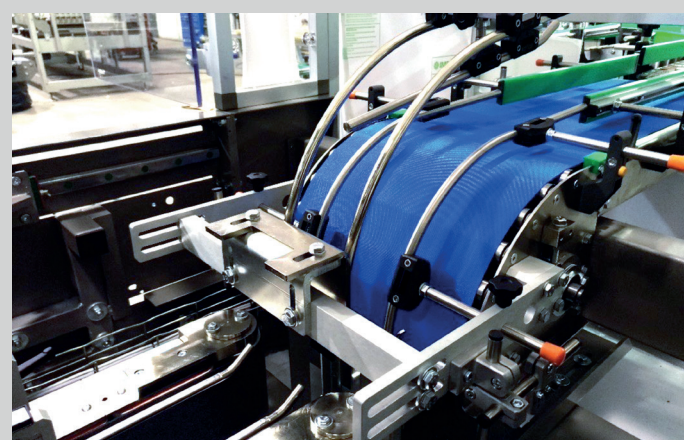

Vertical drop stacker



In-line feeding belt with horizontal stacker

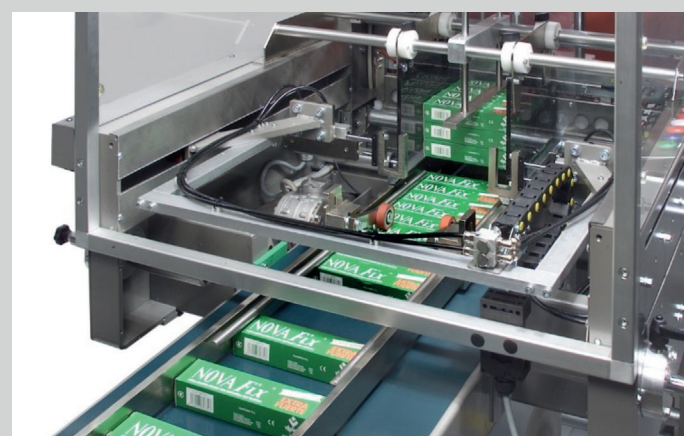

SFE-AU

SIDE-FEED AUTOMATIC
SLEEVE WRAPPER



SECTORS

FOOD

BEVERAGE

DETERGENTS AND CHEMICAL PRODUCTS

TISSUE

LOGISTICS

COSMETIC AND PHARMACEUTICAL

Automatic sleeve wrapper with side feed motorized infeed belt (90°) ideal to be integrated in fully automatic lines performing multi-packs or multi-layers productions.

RECOMMENDED FOR:

- | | | |
|---------|----------------|---------------|
| • Boxes | • Bottles | • Tetra packs |
| • Jars | • Aerosol cans | • Bags |
| • Cans | • Drums | • Paper rolls |

L.P. PACKAGING S.r.l.

Via Europa 3a
40010 Sala Bolognese (BO)
ITALY Tel. +39 051 860013
info@lp-packaging.it

L.P. Packaging reserves the right to change the design and/or specification of products without prior notice.
Part of this information is general only; the customer must ensure they apply to their needs; some functions are optional; out of scale drawings are valid as a description only.



www.lp-packaging.it

IMPROVE YOUR PACKAGING LINE

SFE-AU

**AUTOMATIC MONOBLOCK
SHRINK WRAPPING MACHINE
WITH HEAT-SHRINK FILM AND
90° MOTORIZED FEEDING BELT**


AVAILABLE MODELS

SFE-AU 600 / 800 / 1100 / 1500

The SFE-AU series is the range of automatic shrink wrapping machines with sealing bar suitable for the secondary packaging of a wide range of products. The entire range is designed every day to be extremely versatile and to meet all market needs.


MODEL	SFE 600	SFE 800	SFE 1100	SFE 1500
Maximum product height (mm) **	280/420	330/420	400/600	400/600
Sealing bar width (mm)	560	760	1070	1470
Maximum recommended film width (mm)	500	700	1000	1400
Production speed (packs/min)	up to 25	up to 25	up to 25	up to 25
Tunnel installed power (kw)**	8,8	17,4	20,2	27

** Customizable heights and voltages

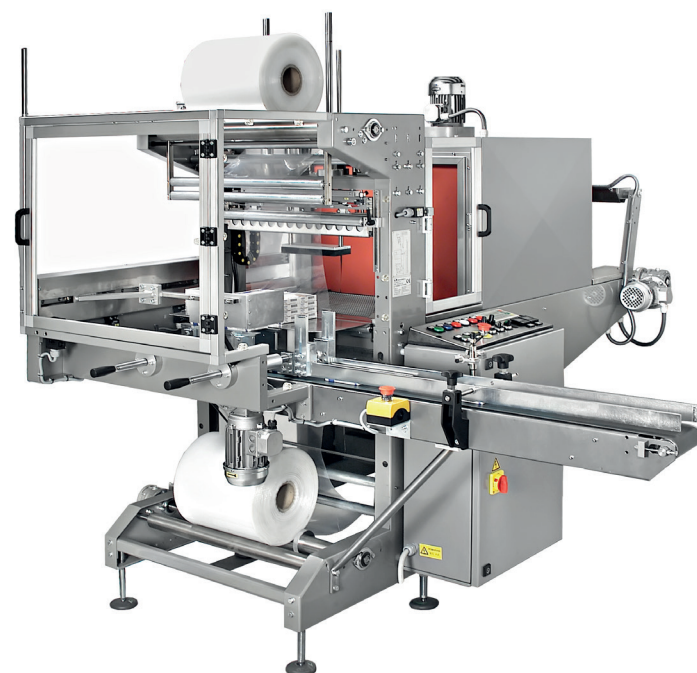


CUSTOMIZED FEEDINGS:


- Pneumatic pusher for speeds up to 15 packs/minute based on the packaging sizes
- Brushless motor pusher for high-speed production, combined with extended or double chamber shrink tunnel for speeds up to 20-25 packs/minute, based on packaging sizes.
- Flat carton insertion device (MC NEW) or ECOTRAY (flat carton with folded side flaps).
- Multi-lanes feeding with or without divider (pneumatic or motorized)
- In-line feeding (double 90°).

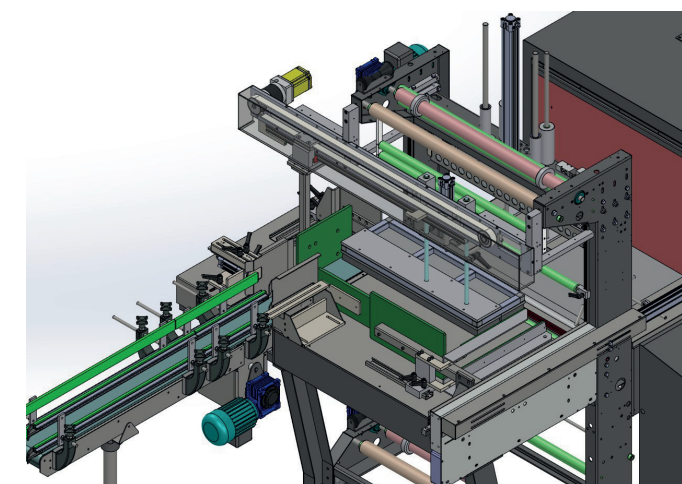


Double 90° feeding

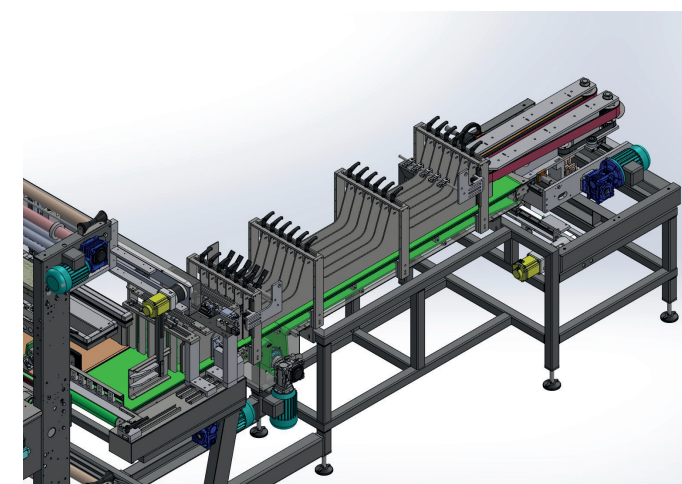


Multi-lane double 90° feeding with motorized divider

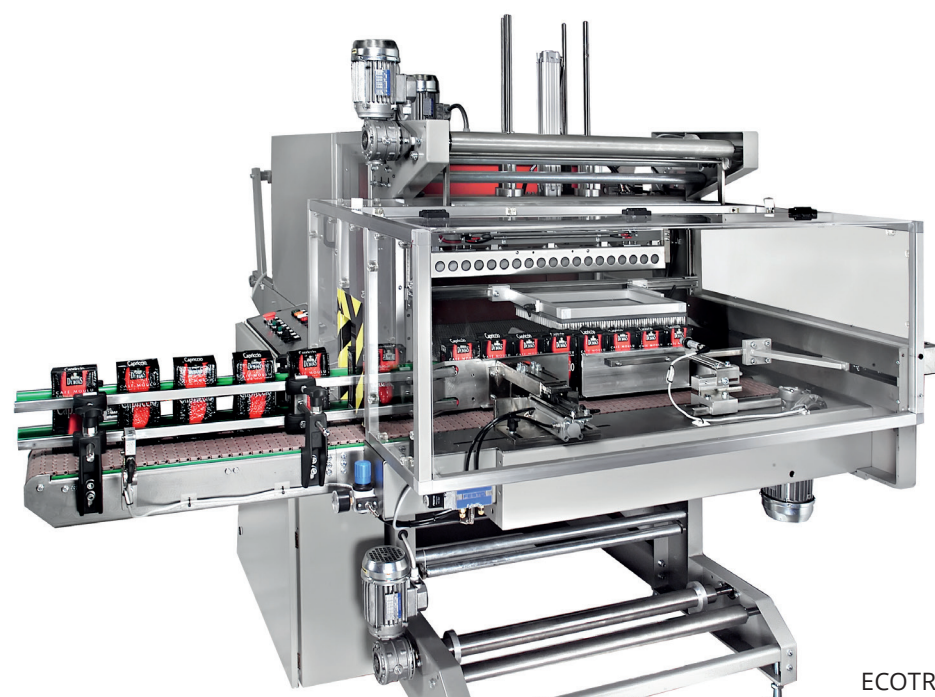

ECOTRAY

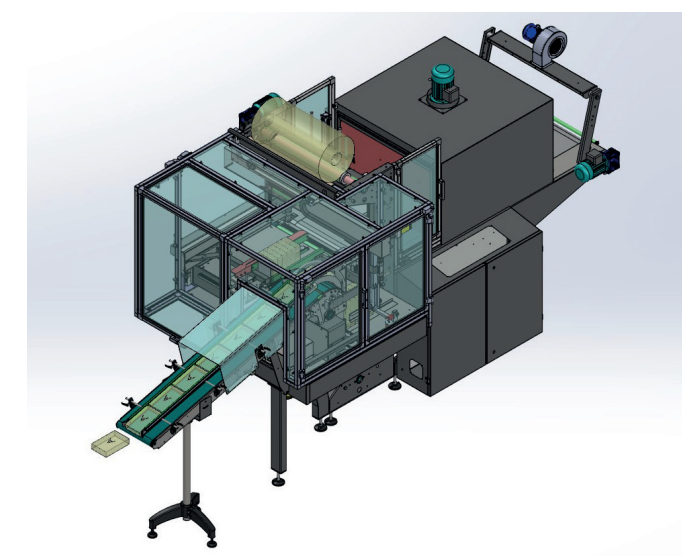

Double 90° feeding with drop stacker

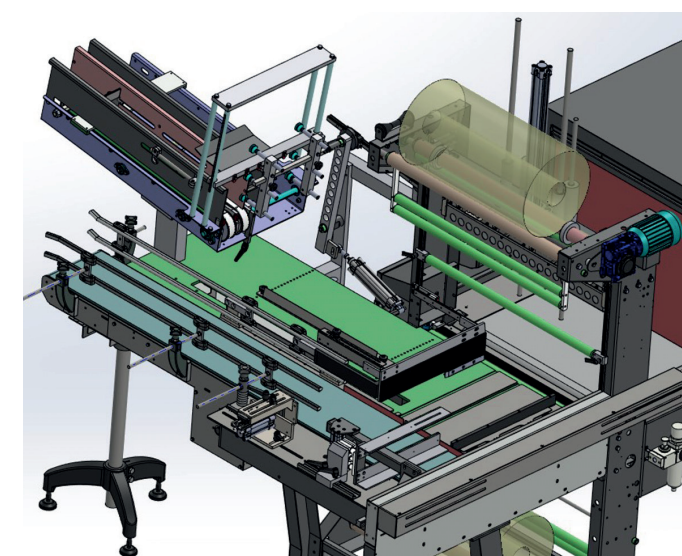

Flap insertion device (MC NEW version)

IMPROVE YOUR PACKAGING LINE