



3-phase power supply IN: 3x  
400–500Vac / OUT: 72Vdc 33A

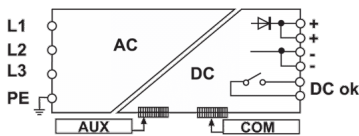

<b>Series</b>	Triple Power
<b>Code</b>	XCSG2401G
<b>Type</b>	CSG2401G
<b>HS code</b>	85044083
<b>INPUT TECHNICAL DATA</b>	
<b>Input rated voltage</b>	3x 400–500 Vac
<b>Input voltage AC</b>	340...550 Vac
<b>Frequency</b>	47...63 Hz
<b>Current consumption</b>	4.2 A (400 Vac) / 3.5 A (500 Vac)
<b>Inrush peak current</b>	10 A (with active limitation circuit)
<b>Power factor</b>	> 0.92
<b>External protection on AC line</b>	MT: C-10 A / Fuse: T 10 A
<b>OUTPUT TECHNICAL DATA</b>	
<b>Output voltage range</b>	72 Vdc ±1%
<b>Output adjustable range</b>	50...87 Vdc
<b>Continuous current</b>	33 A at 45°C
<b>Overload limiting</b>	50 A for >5 s
<b>Short circuit peak current</b>	50 A for 5 s
<b>Ripple @ nominal ratings</b>	200 mVpp
<b>Hold up time</b>	10 ms (400 Vac) / 10 ms (500 Vac)
<b>Status indication</b>	LED "DC OK" / LED "Alarm" / Display
<b>Alarm contact</b>	dry contact, max. 1A
<b>Parallel connection</b>	possible
<b>Redundant parallel connection</b>	already fitted with internal ORing diode
<b>GENERAL TECHNICAL DATA</b>	
<b>Efficiency</b>	92% (400 Vac) / 92% (500 Vac)
<b>Dissipated power</b>	200 W (400 Vac) / 200 W (500 Vac)
<b>Operating temperature range</b>	-20...+60°C (derating -40 W >45°C)
<b>Input / output isolation</b>	3 kVac / 60 s (no SELV output)
<b>Input / ground isolation</b>	1.5 kVac / 60 s
<b>Output / ground isolation</b>	0.5 kVac / 60 s
<b>Standard / approvals</b>	EN 60950-1
<b>EMC Standard</b>	EN 61000-6-2, EN 61000-6-4
<b>Overvoltage category / pollution degree</b>	II / 2
<b>Protection degree</b>	IP 20
<b>Connection terminal</b>	4 mm <sup>2</sup> / 35 mm <sup>2</sup>
<b>Housing material</b>	aluminium
<b>Dimensions (LxHxD)</b>	234x105x130 mm
<b>Approximate weight</b>	2.8 Kg
<b>Mounting information</b>	vertical on a rail, 60 mm from adjacent components
<b>ACCESSORIES</b>	
<b>Mounting rail (IEC60715/TH35-7.5)</b>	PR/3/AC, PR/3/AC/ZB, PR/3/AS, PR/3/AS/ZB
<b>Mounting rail (IEC60715/TH35-15)</b>	PR/3/PP, PR/3/PP/ZB, PR/3/PA, PR/3/PA/ZB
<b>Marking tag</b>	TAP207A, TAP128A, TAP178A, TAP209A
<b>APPROVALS AND MARKINGS</b>	CE, ®,



## DESCRIZIONE DEL PRODOTTO

3-phase power supply IN: 3x 400–500 Vac / OUT: 72 Vdc 33 A